Canon

Color imageCLASS X LBP1538C

Color imageCLASS X LBP1538C

Print up to 40 ppm (Color)

Print up to 8-1/2" x 14"

2,300-sheet maximum paper capacity

Supports uniFLOW and uniFLOW Online

Designed for small- to mid-size workgroups within an office or home environments used as part of organization's print fleet, the Canon imageCLASS X LBP1538C offers speedy performance, minimal maintenance, and the ability to expand paper capacity for busy groups.





WORKFLOW EFFICIENCY

- 5-Line LCD panel with keypad to seamlessly navigate and customize settings to access features used most.
- Supports certain compatible mobile printing solutions.¹
- Designed for small print jobs with firstprint-out time as fast as 6 seconds.
- Provides consistency with the imageRUNNER ADVANCE DX Series.



SECURITY FEATURES

- Helps reduce the risk of confidential information loss, since documents are only stored in short-term memory.
- With imageWARE Enterprise Management Console Device Configuration Manager Plug-in, security settings can be captured and exported to other devices on the same network.²
- Remotely control device access and set rules via optional uniFLOW or uniFLOW Online.
- Verify System at Startup is a process to help verify the validity of the device firmware from unauthorized modifications.



COST MANAGEMENT

- Leverage optional uniFLOW or uniFLOW Online for full accounting and reporting for Canon and third-party devices, pull printing, and job routing.
- Service parts are designed for machine's life cycle to help minimize the need for proactive maintenance and potentially reduce service calls.
- High-capacity, all-in-one cartridge helps reduce overall supply costs.
- Out-of-the-box, standard, two-sided printing plus the ability to print multiple pages onto one sheet help to reduce paper consumption.



DEVICE AND FLEET MANAGEMENT

- Designed for quick, easy deployment.
- Remote diagnostics for rapid service response.
- Easily monitor device status and consumable levels, observe meter readings, manage settings, and implement security settings.



QUALITY AND RELIABILITY

- Canon's signature reliability and engine technologies help keep productivity high and minimize the impact on support resources.
- Designed to achieve maximum uptime with status notifications to help keep supplies replenished.
- Intuitive maintenance videos for common tasks like consumables replacement.



SUSTAINABILITY

- A combination of fusing technologies and low-melting-point toner minimizes power requirements and helps achieve lower energy consumption.
- Encourages environmentally conscious work practices by enabling multiple settings that can help save paper and energy.
- ENERGY STAR[®] certified and currently rated EPEAT[®] Silver.³



MANAGE OUTPUT WITH uniFLOW Online

The optional uniFLOW Online offers a cloud-based printing, and accounting solution that's easy to configure and has the latest security features. The solution extends the standard functionality provided by uniFLOW Online Express by adding My Print, mobile printing, and more, to support users whether they're in the office or at home.



FLEET MANAGEMENT TOOLS

imageWARE Enterprise Management Console can be used by a device administrator to centrally manage the Canon printer fleet, including consumables, status notifications, meters, and configuration settings. imageWARE Remote software allows for the service provider to manage devices proactively, including remote diagnosis and reporting. Local Content Delivery System facilitates remote firmware download at the device level.

SPECIFICATIONS

Main Unit

Core Functions Standard: Print

Processor

Canon Custom Processor **Control Panel**

5-Line LCD Memory

1 GB

Standard Interface Connection

USB 2.0 x2 (Host), USB 2.0 x1 (Device) High-Speed, 10/100/1000Base-T Ethernet (Network), Wi-Fi 802.11b/g/n

Paper Capacity (Letter, 20 lb. Bond) Standard: 650 Sheets

Maximum:

Paper Sources (Letter, 20 lb. Bond)

550-sheet Paper Cassette Standard: 100-sheet Stack Bypass 550-sheet Paper Cassette Optional (Paper Feeder PF-D1) (Up to Three⁵): Optional 550-sheet Paper Cassette (Up to One): (Cassette Feeding Unit-AV1)

2,300 Sheets

Paper Output Capacity (Letter, 20 lb. Bond) Standard: 200 Sheets

Supported Media Types

| Cassettes: | Thin, Plain, Recycled, Color, Heavy, |
|---------------|--|
| | Pre-punched, Bond, Labels |
| Stack Bypass: | Thin, Plain, Recycled, Color, Heavy, Bond, |
| | Pre-punched, Envelope, PostCard |

Supported Media Sizes

| Supported Media Sizes | | |
|---|--|--|
| Letter, Legal, Statement, Executive | | |
| Envelope: COM10, Monarch, C5, DL | | |
| Custom (Min. 3" x 5" to Max. 8.5" x 14") | | |
| Letter, Legal, Statement, Executive, | | |
| Custom (Min 4" x 5.8" to Max. 8.5" x 14") | | |
| Letter, Legal, Statement, Executive | | |
| Envelope: COM10, Monarch, C5, DL | | |
| Custom (Min. 3" x 5" to Max. 8.5" x 14") | | |
| | | |

Supported Media Weights

16 lb. Bond to 43 lb. Bond (60 to 163 g/m²) Cassette: 16 lb. Bond to 58 lb. Bond (60 to 216 g/m²) Stack Bypass

Warm-Up Time

From Power On: 2 Seconds or Less From Sleep 6 Seconds or Less Mode:

Dimensions (W x D x H)

Standard 18" x 18.3" x 15.3" (Desktop): (458 mm x 464 mm x 388 mm)

Installation Space (W x D)

| Standard | 27.4" x 30.1" |
|-------------|-------------------|
| (Desktop): | (696 mm x 764 mm) |
| Fully | 32.1" x 34" |
| Configured: | (815 mm x 864 mm) |
| | |

Weight⁴ Unit:

Approx. 63.9 lb. (29.0 kg)

Supported OS

Windows® 7/Windows 8.1/Windows 10/Windows Server 2008/Windows Server 2008 R2/Windows Server 2012/ Windows Server 2012 R2/Windows Server 2016 / Mac OS X v10.10 (or later)

Print Specifications

Printing Method

Laser Beam Printing Print Speed (Color)⁶ Up to 40 ppm (Letter)

First-Print-Out Time Approx. 6 Seconds

Recommended Monthly Page Volume

2,000 - 10,000 Pages Print Resolution (dpi) 600 x 600

Standard Page Description Languages

UFR II, PCL[®]6, PCL[®]5, Adobe PostScript 3[®] Double-Sided Printing Automatic (Standard)

Direct Print

From RUI (PDF, EPS, TIFF/JPEG, XPS) From USB Memory (PDF, TIFF/JPEG, XPS) From Network Place (PDF, TIFF/JPEG, XPS)

Printing from Mobile and Cloud-based Services¹

Apple[®] AirPrint[®], Canon PRINT Business, Mopria[™] Print Service, Universal Print, uniFLOW Secure Mobile Printing⁷ Fonts PCL: 93 Fonts

PS: 136 Fonts

Print Features

Secure Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/Orientations, Toner Reduction, Poster Printing, Forced hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer

COLOR imageCLASS X LBP1538C

Security Specifications

Authentication and Access Control

User Authentication (Picture Login, Picture and PIN Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Access Management System (Access Control)

Document

Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print)7

Network

TLS 1.3, IPSec, IEEE802.1X authentication, SNMPv3, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), Enabling/Disabling (Network Applications, Remote UI, USB Interface), G3 FAX separation from LAN, USB Port Separation from LAN, Scan and Send -Virus Concerns for E-mail Reception

Device

Standard Storage Initialize, Job Log Conceal Function, Protecting MFP Software Integrity, Verify System at Startup, Runtime Intrusion Detection

Device Management and Auditing

Administrator Password, Digital Certificate and Key Management, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Security Policy Setting

Environmental Specifications

Operating Environment

Temperature: 50 to 86° F Humidity: 20 to 80% RH (No Condensation)

Power Requirements 110-127 V 60 Hz 7.1 A


Power Consumption Maximum:

Approx. 1500 W Approx. 35.3 W Standby: Sleep Mode Approx. 1.1 W . Typical Electricity Consumption (TEC) Rating: 0.46 kWh

Standards

ENERGY STAR® Qualified, Currently Rated EPEAT Silver³

CONFIGURATION AND ACCESSORIES

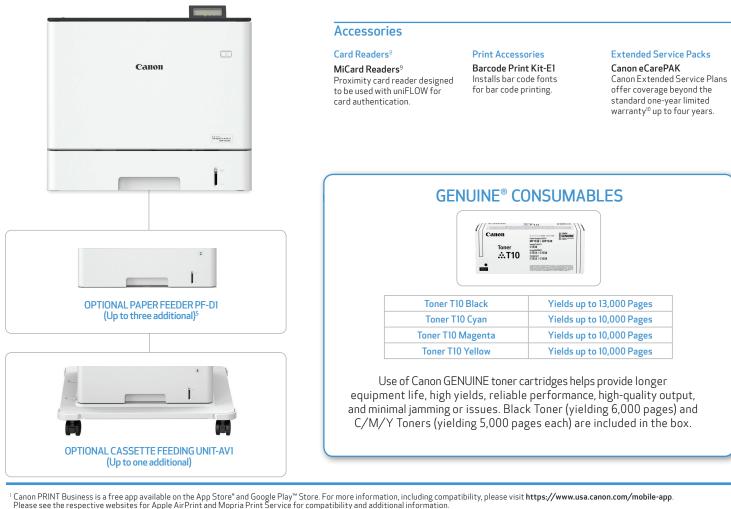

- ² Please reference user manuals for details on settings available to export.
- ³ For latest EPEAT ratings (Gold/Silver/Bronze), please visit www.epeat.net
- ⁴ Includes consumables.
- ⁵ Up to three Paper Feeder-D1 without Cassette Feeding Unit-AV1. Maximum two Paper Feeder PF-D1 with Cassette Feeding Unit-AV1. ⁶ Print speed is based on internal testing. Print speed may vary, depending on the number of copies selected as well as the settings for size, type, and orientation of paper.
- ⁷ Requires optional uniFLOW Online / uniFLOW.
- ⁸ Attachment kit required.
- ⁹ Ask Dealer for reader compatibility information.
- ¹⁰ Limited warranty program is subject to certain conditions and restrictions. See warranty card for details.



Ő

